


T-SERIES BALL VALVES

フランジ付ボールバルブの決定版

- ①飛出し防止ステム
- ②誤操作防止ハンドル
- ③開閉ロック機構を標準装備
- ④帯電防止機構(オプション)
- ⑤ファイアーセーフ構造(テスト合格品)
- ⑥独自のボールシートによる低トルク
- ⑦簡単にできる自動化

THE LAST WORD IN FLANGED ENDS BALL VALVES

- ①Blow-Out Proof Stem
- ②Two Flat Stem
- ③Locking Device as Standard
- ④Anti-Static Device(Option)
- ⑤Fire-Safe Construction(Being Passed the Test)
- ⑥Lower Torque by Unique Ball Seat
- ⑦Easy to Mount Actuator

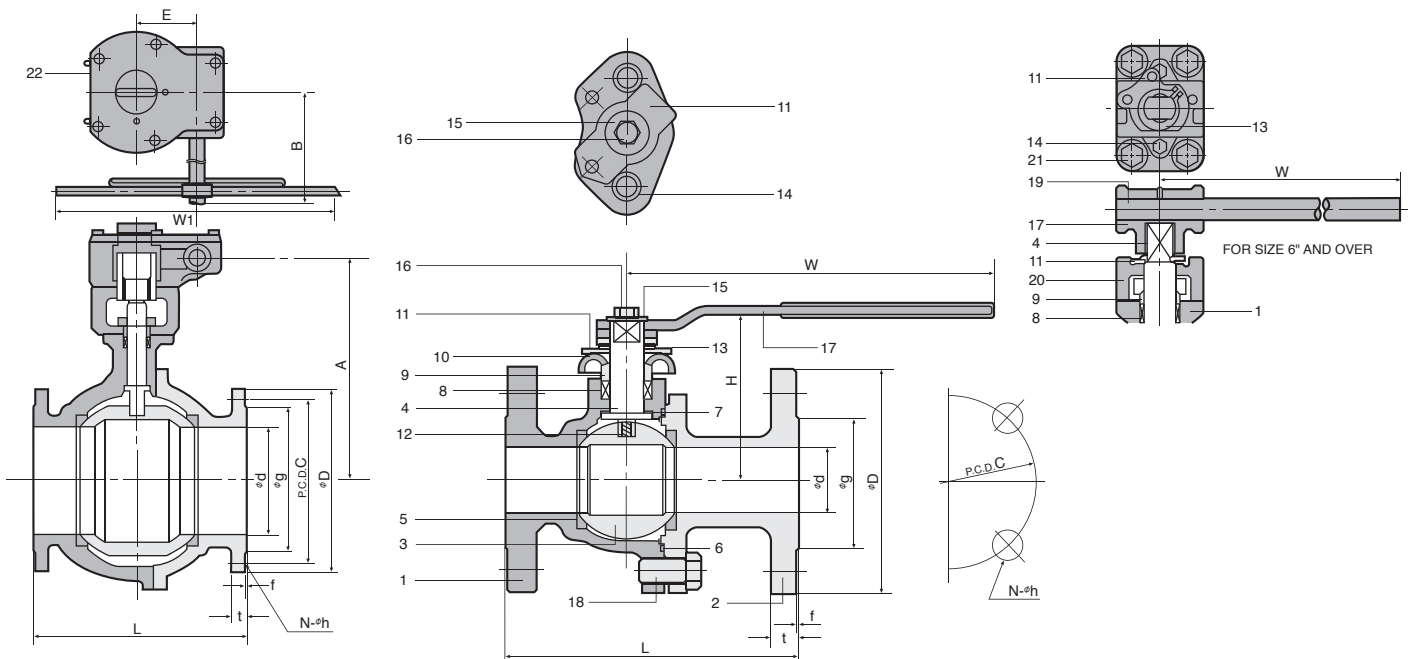

MODEL No.

T - 103

SIZE

FLANGE RATING
JIS10K
JIS20K
ANSI150LB
ANSI300LB

BODY MATERIAL
SCS13(CF8)
SCS14(CF8M)
SCPH2(WCB)

SPECIAL

10
25
15
30

3
4
2

No.	NAME	MATERIAL(SCPH2)	MATERIAL(SCP13)	MATERIAL(SCP14)
1	BODY	SCPH2(WCB)	SCS13(CF8)	SCS14(CF8M)
2	CAP	SCPH2(WCB)	SCS13(CF8)	SCS14(CF8M)
3	BALL	304SS/SCS13(CF8)	304SS/SCS13(CF8)	316SS/SCS14(CF8M)
4	STEM	304SS	304SS	316SS
5	BALL SEAT	PTFE	PTFE	PTFE
6	BODY GASKET	PTFE	PTFE	PTFE
7	THRUST BEARING	PTFE	PTFE	PTFE
8	GRAND PACKING	PTFE	PTFE	PTFE
9	GLAND RING	304SS	304SS	316SS
10	GLAND FLANGE	STEEL	304SS	304SS
11	STOPPER	STEEL	304SS	304SS
12	SPRING	316SS	316SS	316SS
13	SNAP RING	STEEL	304SS	304SS
14	GLAND BOLT	STEEL	304SS	304SS
15	HANDLE WASHER	STEEL	STEEL	STEEL
16	HANDLE BOLT	STEEL	STEEL	STEEL
17	HANDLE	STEEL/DUCTILE	STEEL/DUCTILE	STEEL/DUCTILE
18	BOLT	STEEL	304SS	304SS
19	HANDLE PIPE	STEEL	STEEL	STEEL
20	YOKE	DUCTILE	DUCTILE	DUCTILE
21	YOKE BOLT	STEEL	STEEL	STEEL
22	GEAR	STEEL	STEEL	STEEL

●=ANTI-STATIC ●=ZnPLATED ●=STEEL(Zn PLATED)/DUCTILE(PAINTED) ●=PAINTED

BALL VALVE

GATE VALVE

GLOBE VALVE

CHECK VALVE

OTHER VALVE

TECHNICAL DATA